



# ACCESSORIES

## SKD-11 FLOW CONTROLLER



**TRACER PUMPS**  
LEADING IN MOTION

2023 V1

# FLOW CONTROL SWITCH

## SKD-11

### Performance range

Flow from 0 to 15m<sup>3</sup>/h.

The SKD-11 flow control starts the pump automatically when pressure decreases (for example taps are opened) and stops it when there is no flow/water shortage (for example taps are closed). It can be used for drinking water or non-potable water piping systems.

### Operating limits


Pipe Water Temperature                      0 - 60°C (not frozen)  
Ambient Temperature                            0 - 45°C

**Note:** Use separate non-return valve with this device.



### Technical features

Rated Voltage:                                    220VAC, 50Hz  
Maximum current:                                30 Amp  
Protection grade:                                IP65  
Starting pressure:                                1.2 bar  
Maximum pressure:                               10 bar  
Inlet/outlet size:                                (1¼" x 1¼") BSP

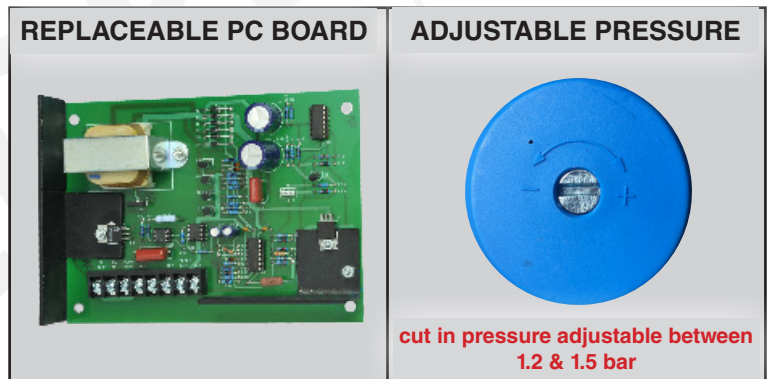

MODEL	INPUT VOLTAGE	FREQUENCY	CURRENT	POWER		STANDBY POWER
	(V)	(Hz)	(A)	(W)	(HP)	(W)
SKD-11A	220	50	30	3300	4.4	16

### Sectional drawing

