

FOUNTAIN RANGE

HB & JHQ



TRACER PUMPS

LEADING IN MOTION

24-01

FOUNTAIN PUMP

HB

Application

These pumps can be used in water features, fountains, aquariums and ponds for circulation.

They are highly energy efficient and have a long service life.

Performance range

Maximum head: 2.7m
 Maximum flow: 1500L/h
 Power: 13.5W TO 40W

Operating limits

Maximum liquid temperature: 40°C
 Length of operating time: Continuous duty




Performance chart

Model	VOLTAGE	POWER W	MAX. HEAD (m)	MAX. FLOW m/h	CABLE LENGTH (m)	OUTLET (mm)	PLUG	WEIGHT (kg)	DIMENSIONS L x W x H (mm)
AP-161	220V/50Hz	16	1.3	0.8	1.5	13	2 point	0.45	108x73x75
AP-221	220V/50Hz	22	1.6	1	1.5	15	2 point	0.55	123x82x85
AP-401	220V/50Hz	40	2.5	1.8	1.5	18	2 point	1	155x106x108

PERFORMANCE

Curve

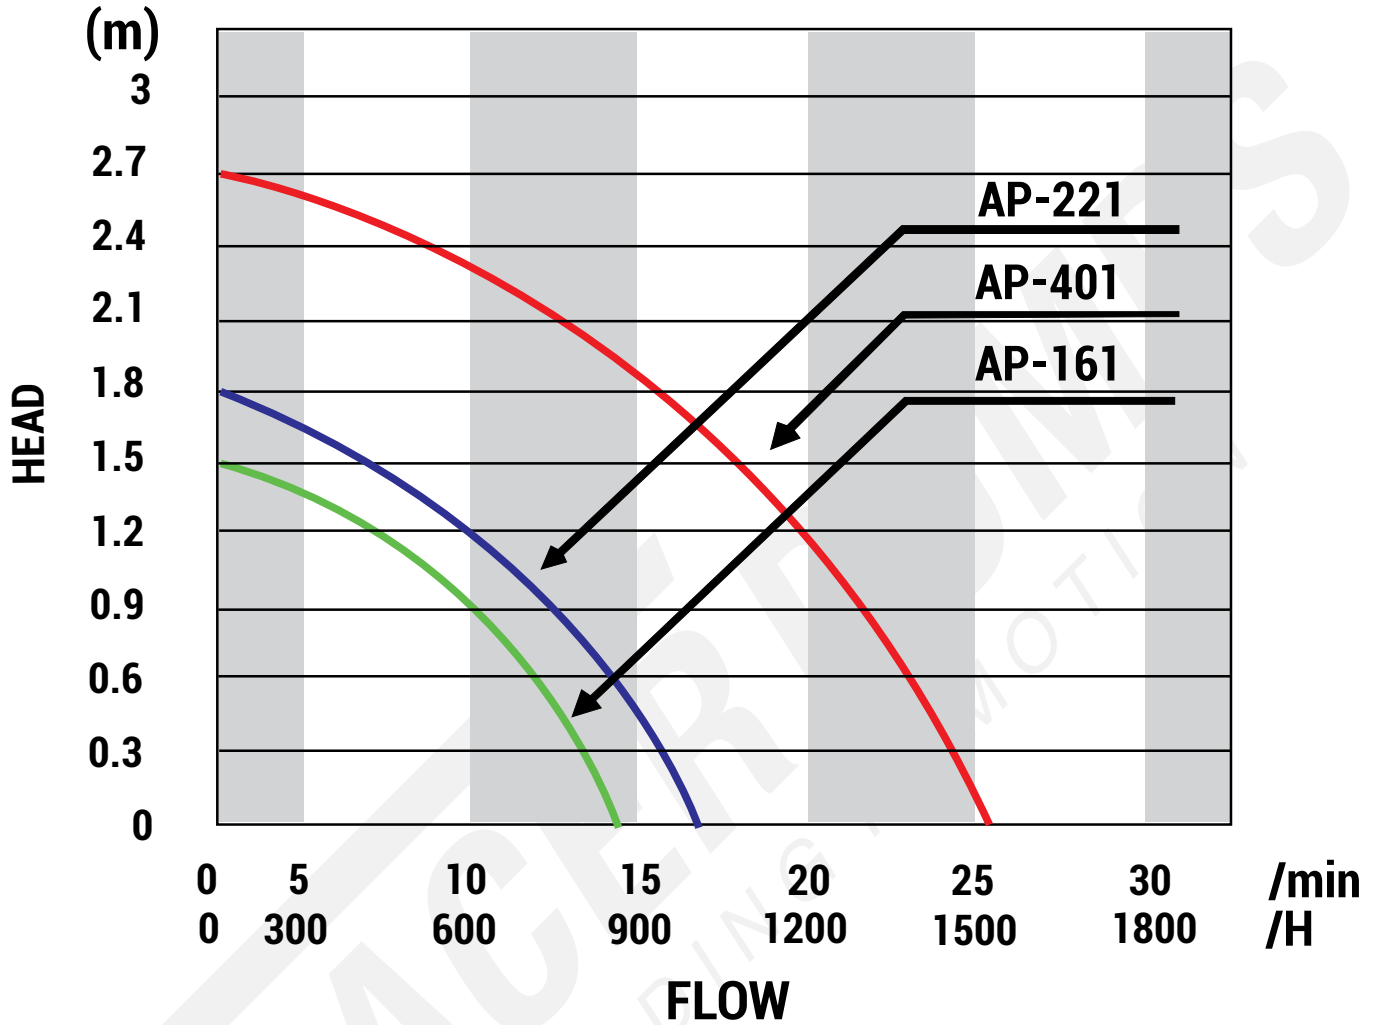

FOUNTAIN PUMP

JHQ

Application

These pumps can be used in water features, fountains, aquariums and ponds for circulation.

They are highly energy efficient and have a long service life.

Performance range

Maximum head: 2.5m
Maximum flow: 2000L/h
Power: 55W

Operating limits

Maximum liquid temperature: 40°C
Length of operating time: Continuous duty




Performance chart

Model	VOLTAGE	POWER W	MAX. HEAD (m)	MAX. FLOW m/h	CABLE LENGTH (m)	OUTLET (mm)	PLUG	WEIGHT (kg)	DIMENSIONS L x W x H (mm)
APS-451	220V/50Hz	50	2.7	1.6	3	19	3 point	1	110x72x96

PERFORMANCE

Curve

Performance curves

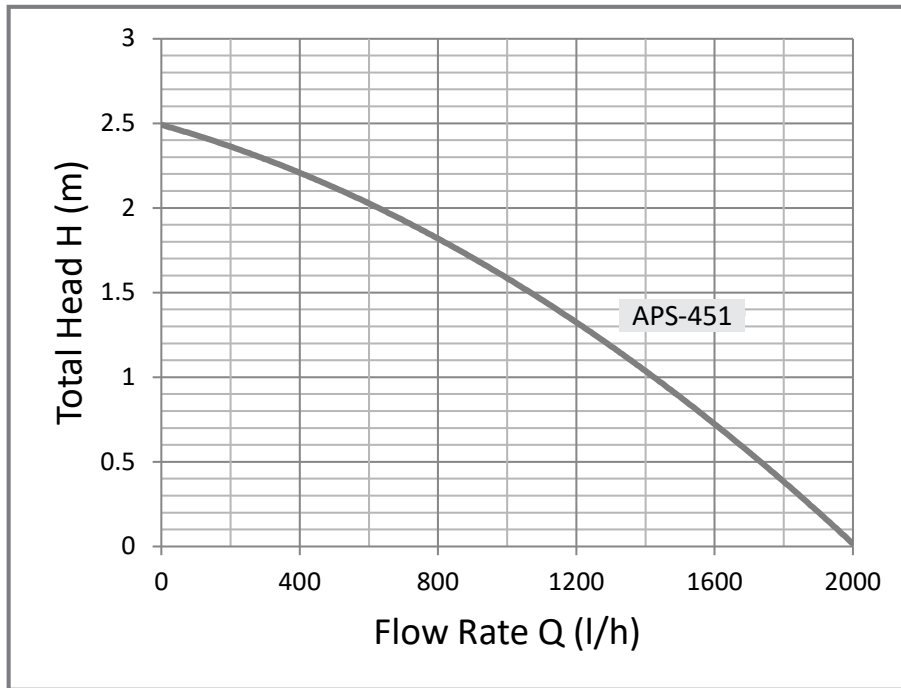

Dimensions

MODEL	WEIGHT	L	W	H
APS-451	1kg	110mm	72mm	96mm